

TELEHANDLERS



	HTL32 10	HTL35 10	HTL40 10	HTL36 14	HTL36 17	HTL40 14	HTL40 17	HTL52 10	HTL65 08	HTL72 10
Maximum lift capacity	3.200 kg	3.500 kg	4.000 kg	3.600 kg	3.600 kg	4.000 kg	4.000 kg	5.200 kg	6.500 kg	7.200 kg
Lift capacity to full height	2.500 kg	2.000 kg	2.500 kg	3.000 kg	2.500 kg	3.000 kg	2.500 kg	5.200 kg	4.200 kg	3.800 kg
Lift capacity at full reach	850 kg	500 kg	1.200 kg	800 kg	500 kg	1.000 kg	700 kg	3.500 kg	2.000 kg	2.000 kg
Maximum fork height	10.000 m	10.000 m	10.000 m	13.600 m	16.700 m	13.600 m	16.500 m	10.000 m	7.700 m	9.500 m
Maximum forward reach	7.200 m	7.200 m	7.200 m	9.800 m	12.850 m	9.800 m	12.850 m	2.600 m	4.200 m	5.400 m
Outside turning radius	3.700 m	3.700 m	3.700 m	4.500 m	4.500 m	4.500 m	4.500 m	4.200 m	4.400 m	4.400 m
Length	4.950 m	4.950 m	4.950 m	6.550 m	6.550 m	6.550 m	6.550 m	9.800 m	5.000 m	5.900 m
Width	2.260 m	2.260 m	2.260 m	2.400 m	2.400 m	2.400 m	2.400 m	2.400 m	2.400 m	2.400 m
Speed in traveling mode	15.5 mph	15.5 mph	15.5 mph	18.6 mph	18.6 mph	18.6 mph	18.6 mph	0 mph	18.6 mph	18.6 mph
Engine model	Kohler/Perkins		Kohler/Perkins		Kohler/Perkins		Kohler/Perkins		Perkins	FPT

(TIER IV i / TIER III) (TIER IV i) (TIER III)

Non contractual document - We reserve the right to modify the technical characteristics of this document without notice 09/2016



PEKANBARU
 Jl. Siak II Km 16
 Pekanbaru 28265
 Phone : +62 761 7877 540 (Hunting)
 Fax : +62 761 7877 545
 Email : pekanbaru@probesco.com

SURABAYA
 Jl. Raya Prapen No. 40
 Surabaya 60299
 Phone : +62 31 8478 968 / 69
 Fax : +62 31 8478 971
 Email : surabaya@probesco.com

BANJARMASIN
 Jl. Jend. A. Yani Km 30 No. 3A Rt.25 /
 Rw.04 - Banjarbaru 70721
 Phone : +62 511 4784 390, 4782 988
 Fax : +62 511 4784 667
 Email : banjarmasin@probesco.com

JAMBI
 Jl. P. Hidayat No. 88
 Jambi 36128
 Phone : +62 741 445 657 / 58 / 59
 Fax : +62 741 445 660
 Email : jambi@probesco.com

BALIKPAPAN
 Jl. Mulawarman No. 4
 Balikpapan 76116
 Phone : +62 542 747 777 (Hunting)
 Fax : +62 542 747 666
 Email : balikpapan@probesco.com

MEDAN
 Jl. Medan - Tg. Morawa Km. 13.7
 Medan 20362
 Phone : +62 61 7944 488 (Hunting)
 Fax : +62 61 7940 777
 Email : medan@probesco.com

PONTIANAK
 Jl. Arteri Supadio Km 15 No. 77
 Pontianak 78391
 Phone : +62 561 725 535
 Fax : +62 561 725 536
 Email : pontianak@probesco.com

MAKASSAR
 Jl. KIMA III, Kav.3A Kawasan Industri
 Makassar - Makassar 90241
 Phone : +62 411 515 550 / 515 551
 Fax : +62 411 514 888
 Email : makassar@probesco.com

SAMARINDA
 Jl. Cipto Mangunkusumo No. 2
 Samarinda 75131
 Phone : +62 541 262 581
 Fax : +62 541 262 751
 Email : samarinda@probesco.com

MANADO
 Jl. A.A Maramis 245,
 Kel. Paniki Bawah
 Manado 95256
 Phone : +62 431 811 021
 Email : manado@probesco.com

PALEMBANG
 Jl. Demang Lebar Daun No. 1799
 20 Ilir IV, Ilir Timur I
 Palembang 30128
 Phone : +62 711 420 457
 Fax : +62 711 420 573
 Email : Palembang@probesco.com

PADANG
 Jl. Prof. Dr. Hamka No. 14
 Padang 25171
 Phone : +62 751 7052 517 / 19
 Fax : +62 751 446 944
 Email : padang@probesco.com

BERAU
 Jl. Gatot Subroto No. 89 Tanjung Redeb
 Berau - 77311
 Phone : +62 554 2021 217 (Hunting)
 Fax : +62 554 2021 217
 Email : berau@probesco.com

SAMPIT
 Jl. Pelita Barat No. 36 RT 45/ RW 09
 Kodepos 74323
 Sampit - Kalimantan Tengah
 Phone : +62 531 334 85
 Fax : +62 531 253 60
 Email : sampit@probesco.com

KETAPANG
 Jl. Brigjen Katamso No. 91
 Ketapang 78814
 Phone : +62 534 345 11
 Fax : +62 534 345 13
 Email : ketapang@probesco.com

BENGKULU
 Jl. P Tende KM 5 No. 18B
 Jembatan kecil, Gading cempaka
 Phone : +62 736 348 647 (Hunting)
 Email : bengkulu@probesco.com


LAMPUNG
 Jl. Raya Natar Pemanggilan No. 18
 Hajimena Lampung Selatan 35362
 Phone : +62 721 8012 415
 Fax : +62 551 8012 416
 Email : lampung@probesco.com


TARAKAN
 Jl. Bhayangkara No. 03A Rt.65
 Tarakan 77111
 Phone : +62 551 2026 198
 Fax : +62 551 2026 032
 Email : tarakan@probesco.com


TIMIKA
 Jl. Cendrawasih No. 402 (poros) SP3
 Timika - Papua 99910
 Phone : +62 821 9994 2848
 Email : timika@probesco.com





AERIAL WORK PLATFORMS RANGE


- 

SCISSOR LIFTS
- 

ARTICULATED BOOMS
- 

VERTICAL MASTS
- 

TELESCOPIC BOOMS
- 

PUSH AROUND
- 


TELEHANDLERS

HEADQUARTER

PT. METRON INTERCON
 KEM Tower 15th Floor
 Jl. Landasan Pacu Barat Blok B10 Kav.2
 Kota Baru Bandar Kemayoran
 Jakarta Pusat 10610
 Phone : +62 21 6570 4111 (Hunting)
 Fax : +62 21 6570 4110




ELECTRIC SCISSOR LIFTS

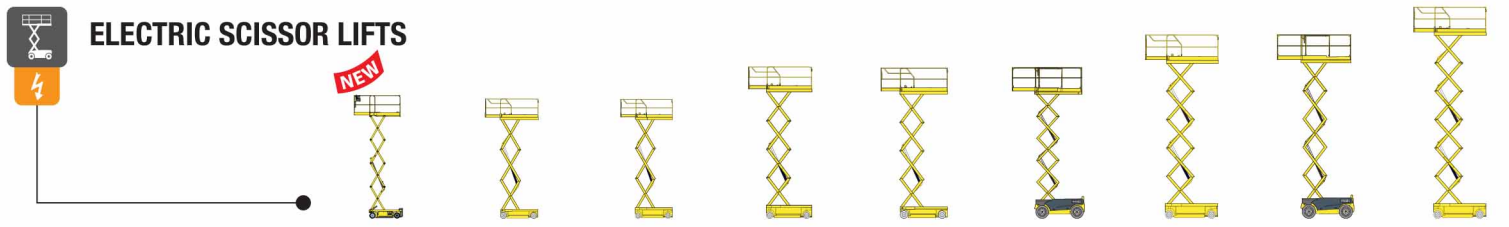

	Optimum 8	Compact 8	Compact 8 W	Compact 10 N	Compact 10	Compact 10 RTE	Compact 12	Compact 12 RTE	Compact 14
Working height	7.77 m	8.2 m	8.27 m	10 m	10.15 m	10.28 m	11.98 m	12.06 m	13.85 m
Platform height	5.77 m	6.2 m	6.27 m	8 m	8.15 m	8.28 m	9.98 m	10.06 m	11.85 m
Lift capacity	230 kg	350 kg	450 kg	230 kg	450 kg	565 kg	300 kg	450 kg	350 kg
Platform size - extended	2.59 x 0.74 m	3.23 x 0.81 m	3.23 x 1.2 m	3.23 x 0.81 m	3.23 x 1.2 m	3.7 x 1.45 m	3.23 x 1.2 m	3.7 x 1.45 m	3.23 x 1.2 m
Height - stowed	1.98 m	2 m	2.14 m	2.18 m	2.26 m	2.44 m	2.39 m	2.56 m	2.5 m
Overall width	0.79 m	0.81 m	1.2 m	0.81 m	1.2 m	1.78 m	1.2 m	1.78 m	1.2 m
Lenght	1.9 m	2.49 m	2.49 m	2.49 m	2.49 m	2.64 m	2.49 m	2.64 m	2.49 m
Gradeability	25 %	23 %	23 %	23 %	23 %	25 %	23 %	25 %	23 %
Batteries	24 V - 130 Ah (C20)	24 V - 210 Ah (C20)	24 V - 330 Ah (C20)	24 V - 210 Ah (C20)	24 V - 330 Ah (C20)	48 V - 255 Ah (C5)	24 V - 340 Ah (C20)	48 V - 255 Ah (C5)	24 V - 340 Ah (C20)
Weight	1.520 kg	1.655 kg	2.030 kg	2.190 kg	2.330 kg	3.305 kg	2.470 kg	3.675 kg	3.168 kg

ROUGH TERRAIN SCISSOR LIFTS

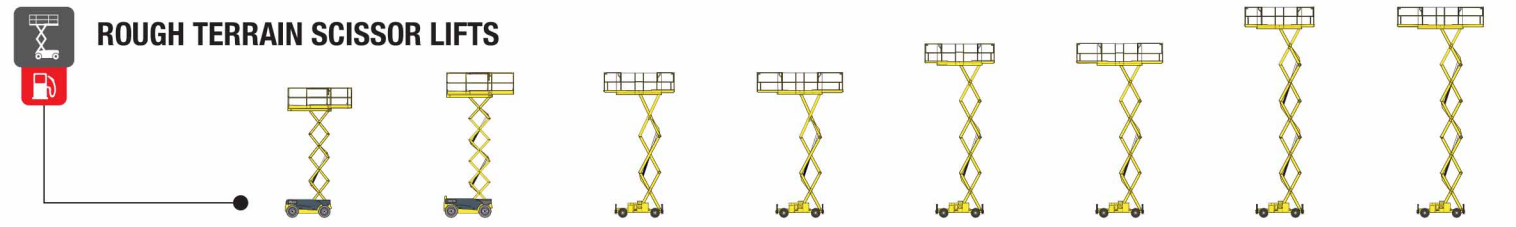

	Compact 10 DX	Compact 12 DX	H 12 SX	H 12 SXL	H 15 SX	H 15 SXL	H 18 SX	H 18 SXL
Working height	10.28 m	12.06 m	12 m	12 m	15 m	15 m	18 m	18 m
Platform height	8.28 m	10.06 m	10 m	10 m	13 m	13 m	16 m	16 m
Lift capacity	565 kg	450 kg	700 kg	700 kg	500 kg	500 kg	500 kg	500 kg
Platform size - extended	3.7 x 1.45 m	3.7 x 1.45 m	6 x 1.89 m	7.3 x 1.89 m	6 x 1.89 m	7.3 x 1.89 m	6 x 1.89 m	7.3 x 1.89 m
Height - stowed	2.44 m	2.56 m	2.59 m	2.56 m	2.77 m	2.77 m	2.99 m	2.99 m
Width	1.78 m	1.78 m	2.25 m	2.25 m	2.25 m	2.25 m	2.25 m	2.25 m
Lenght	3.17 m	3.17 m	4.18 m	5.3 m	4.18 m	5.3 m	4.18 m	5.3 m
Gradeability	40 %	40 %	45 %	45 %	45 %	45 %	45 %	45 %
Engine	18.5 kW - 24.8 hp	18.5 kW - 24.8 hp	23.1 kW - 31.4 hp	23.1 kW - 31.4 hp	23.1 kW - 31.4 hp	23.1 kW - 31.4 hp	23.1 kW - 31.4 hp	23.1 kW - 31.4 hp
Weight	3.520 kg	4.110 kg	5.440 kg	5.610 kg	6.300 kg	6.470 kg	7.240 kg	7.360 kg

ELECTRIC VERTICAL MASTS



	Star 6	Star 6 P	Star 8	Star 10
Working height	5.8 m	6 m	8.7 m	10 m
Platform height	3.8 m	4 m	6.7 m	8 m
Horizontal outreach	N/A	N/A	3 m	3 m
Lift capacity	230 kg	180 kg	200 kg	200 kg
Lenght	1.4 m	1.5 m	2.7 m	2.7 m
Width	0.79 m	0.76 m	1 m	1 m
Height - stowed	1.75 m	1.65 m	1.99 m	1.99 m
Gradeability	25 %	20 %	25 %	25 %
Power source	12 V - 105 Ah (C5)	24 V - 185 Ah (C5)	24 V - 250 Ah	24 V - 250 Ah
Weight	835 kg	820 kg	2.585 kg	2.677 kg

ELECTRIC ARTICULATING BOOMS




	HA 12 CJ	HA 12 CJ+	HA 12 IP	HA 15 IP
Working height	11.68 m	11.68 m	12 m	14.87 m
Platform height	9.68 m	9.68 m	10 m	12.87 m
Horizontal outreach	6.94 m	7.22 m	6.5 m	8.65 m
Up and over clearance	4.74 m	4.74 m	5.3 m	6.25 m
Lift capacity	250 kg	230 kg	230 kg	230 kg
Width	1.2 m	1.2 m	1.35 m	1.52 m
Height - stowed	1.99 m	1.99 m	2.06 m	2.1 m
Gradeability	25 %	25 %	25 %	25 %
Energy	48 V - 320 Ah (C5)	48 V - 320 Ah (C5)	48 V - 345 Ah	48 V - 345 Ah
Weight	7.065 kg	7.110 kg	5.945 kg	7.230 kg

ROUGH TERRAIN ARTICULATING BOOMS



	HA 120 PX	HA 16 RTJ	H 16 RTJO H 16 RTJ PRO	HA 18 SPX	HA 18 PX	HA 20 RTJ	HA 20 RTJ PRO	HA 260 PX	HA 32 RTJ PRO	HA 32 RTJ PRO
Working height	12.4 m	16 m	16 m	17.2 m	17.2 m	20.6 m	20.6 m	25.6 m	31.8 m	41.5 m
Platform height	10.4 m	14 m	14 m	15.2 m	15.2 m	18.6 m	18.6 m	23.6 m	29.8 m	39.5 m
Horizontal outreach	6.6 m	8.3 m	8.3 m	10.6 m	10.6 m	12.2 m	12.2 m	16.2 m	21.6 m	20.1 m
Up and over clearance	5.7 m	7.65 m	7.65 m	6.5 m	6.6 m	8.4 m	8.4 m	6.76 m	11.35 m	17.5 m
Lift capacity	230 kg	230 kg	230 kg	230 kg	230 kg	230 kg	230 kg	230 kg	250 kg	230 kg
Width	1.9 m	2.3 m	2.3 m	2.3 m	2.3 m	2.42 m	2.42 m	2.38 m	2.53 m	2.5 m
Height - stowed	2.2 m	2.3 m	2.3 m	2.2 m	2.3 m	2.51 m	2.51 m	2.71 m	2.8 m	2.99 m
Gradeability	45 %	40 %	40 %	40 %	50 %	45 %	45 %	40 %	45 %	40 %
Power source	21 kW - 28.5 hp	kubota 26 kW - 35 hp	kubota 26 kW - 35 hp	31.2 kW - 42.4 hp	31 kW - 42 hp	kubota 36.5 kW - 49.5 hp	kubota 36.5 kW - 49.5 hp	33.2 kW - 45.1 hp	TIER 3: PERKINS 55.5 kW (EU) / 62.4 kW (ROW) TIER 4: DEUTZ 55 kW	TIER 3: PERKINS 55.5 kW (EU) / 62.4 kW (ROW) TIER 4: DEUTZ 55 kW
Weight	5.670 kg	4.110 kg	6.450 / 6.650 kg	7.660 kg	8050 kg	9.300 kg	9.600 kg	15.890 kg	20.100 kg	23.900 kg

PUSH AROUND

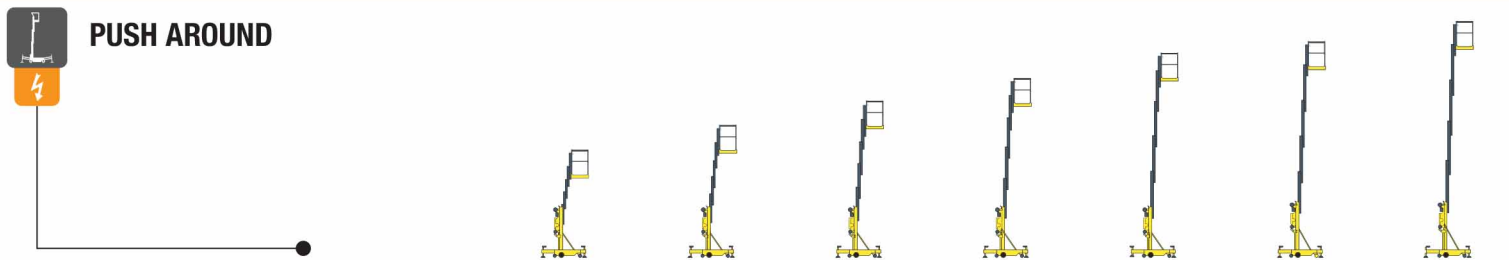

	QUICK-UP 7	QUICK-UP 8	QUICK-UP 9	QUICK-UP 11	QUICK-UP 12	QUICK-UP 13	QUICK-UP 14
Working height	6.7 m	8.1 m	9.5 m	10.8 m	12.3 m	13.7 m	14.3 m
Platform height	4.7 m	6.1 m	7.5 m	8.8 m	10.3 m	11.7 m	12.3 m
Lift capacity	200 kg	159 kg	159 kg	159 kg	136 kg	136 kg	136 kg
Platform size	0.68 x 0.66 m	0.68 x 0.66 m	0.68 x 0.66 m	0.68 x 0.66 m	0.68 x 0.66 m	0.68 x 0.66 m	0.68 x 0.66 m
Height - stowed	1.78 m	1.98 m	1.98 m	1.98 m	1.98 m	1.98 m	2.8 m
width	0.8 m	0.8 m	0.8 m	0.8 m	0.8 m	0.8 m	0.8 m
Lenght	1.22 m	1.28 m	1.28 m	1.34 m	1.4 m	1.47 m	1.42 m
Energy (AC)	110 or 230 V	110 or 230 V	110 or 230 V	110 or 230 V	110 or 230 V	110 or 230 V	110 or 230 V
Weight (AC)	315 kg	340 kg	360 kg	380 kg	415 kg	455 kg	515 kg
Weight (DC)	357 kg	382 kg	402 kg	422 kg	457 kg	497 kg	557 kg

TELESCOPIC BOOMS



	H 14 TX	H 16 TPX	HT 21 RT 0 / HT 21 RT PRO	HT 23 RTJ 0 / HT 23 RTJ PRO	HT 43 SX RTJ PRO
Working height	14 m	15.4 m	20.6 m	22.5 m	42.2 m
Platform height	12 m	13.4 m	18.6 m	20.5 m	40.2 m
Horizontal outreach	10.6 m	12.3 m	15.9 m	18.3 m	20.2 m
Lift capacity	230 kg	230 kg	230 kg (2 persons)	230 kg (2 persons)	230 - 450 kg
Lenght - stowed	7.6 m	8.5 m	9 m	10.4 m	14.8 m
Width	2.3 m	2.3 m	2.47 m	2.47 m	2.5 m
Height - stowed	2.3 m	2.3 m	2.7 m	2.7 m	3.05 m
Gradeability	50 %	50 %	40 %	40 %	40 %
Engine	Deutz 31.2 kW - 42.4 hp	Deutz 31.2 kW - 42.4 hp	TIER 4 interim / Stage 3A Kubota 36.5 kW - 48.9 hp	TIER 4 interim / Stage 3A Kubota 36.5 kW - 48.9 hp	TIER 3: Perkins 55 kW (EU) / 62.4 kW (ROW) TIER 4: DEUTZ 55 kW
Weight	5.900 kg	6.800 kg	11.340 kg	11.420 kg	13.320 kg