COMPLETE PRODUCT SPECIFICATIONS

ELECTRIC ARTICULATING BOOMS



	HA12CJ	HA12CJ+	SIGMA16	SIGMA16 PRO
Working height	11.68 m	11.68 m	16.1 m	15.7 m
Horizontal outreach	6.94 m	7.22 m	8.3 m	8 m
Up and over clearance	4.74 m	4.74 m	7.4 m	
Lift capacity - inside & outside	250 kg	230 kg	230 kg	
Width	1.2 m	1.2 m	1.75 m	
Weight	7065 kg	7110 kg	6900 kg	6950 kg

ELECTRIC ROUGH TERRAIN ARTICULATING BOOMS



	HA16 E	HA16 E PRO	HA20 LE	HA20 LE PRO
Working height	16 m		20.3 m	20.4 m
Horizontal outreach	7.9 m		11.9 m	
Up and over clearance	7.9 m		8.4 m	8.5 m
Lift capacity - inside & outside	300 kg		250 kg	
Width	2.3 m		2.43 m	
Weight	7030 kg	7120 kg	9375 kg	9785 kg
360° continuous rotation	N/A	Optional Equipment	N/A	Optional Equipment

DIESEL ROUGH TERRAIN ARTICULATING BOOMS



	HA16			HA20		HA26 RTJ PRO	HA32 RTJ PRO	HA41 RTJ PRO
	RTJ	RTJ O	RTJ PRO	RTJ	RTJ PRO			
Working height		16 m		20.5 m		26.4 m	31.8 m	41.5 m
Horizontal Outreach		8.3 m		11.9 m		17.5 m	21.6 m	20.1 m
Up and over clearance		7.65 m		8.5 m		9.3 m	11.35 m	17.5 m
Lift capacity inside and outside		230 kg		250 kg		250 kg	250 kg	230 kg
Width		2.3 m		2.43 m		2.48 m	2.53 m	2.53 m
Weight	6200 kg	6450 kg	6540 kg	9180 kg	9430 kg	15500 kg	20100 kg	23900 kg

Haulotte

ACCESS EVERY POSSIBILITY

COMPLETE RANGE OF **HAULOTTE** EQUIPMENT



Metron

KEM Tower 15th Floor, Jl. Landasan Pacu Barat Blok B10 Kav. 2, Kota Baru Bandar Kemayoran, Jakarta Pusat 10610
Phone: +62 21 6570 4111 (Hunting) | Fax: +62 21 6570 4110 | Email: info@metronintercon.com

Jakarta | Surabaya | Medan | Pekanbaru | Padang | Jambi | Lampung | Palembang | Balikpapan | Banjarmasin | Pontianak | Sampit | Samarinda | Berau | Tarakan | Ketapang | Pangkalan Bun | Makassar | Manado | Timika | Kendari

COMPLETE PRODUCT SPECIFICATIONS


Metron

VERTICAL MASTS



	Star 6	Star 6 PICKING	Star 6 CRAWLER	Star 8S	VERTICAL MASTS WITH JIB Star 10
Working height	5.8 m	5.8 m	5.8 m	7.95 m	10 m
Horizontal outreach	0.4m extension	-	0.4m extension	0.4m extension	3 m
Lift capacity - inside	230 kg	210 kg	200kg	200 kg	200 kg
Lift capacity - outside	230 kg	N/A	200 kg	N/A	200 kg
Length	1.4 m	1.65 m	1.44 m	1.4 m	2.7 m
Width	0.79 m	0.79 m	0.76 m	0.79	1 m
Height - stowed	1.8 m	1.75 m	1.72 m	1.98 m	1.99 m
Weight	862 kg	890 kg	1175 kg	1150 kg	2677 kg

PUSH AROUND

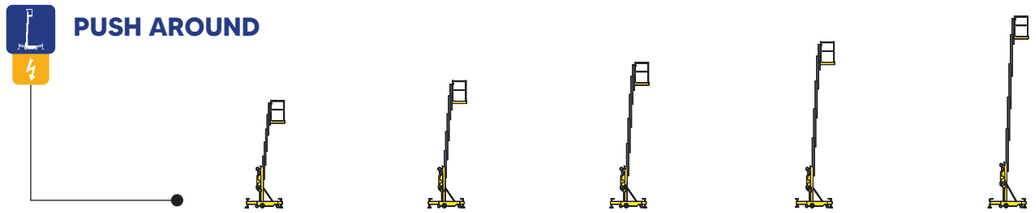


	QUICK-UP 8 AC/DC	QUICK-UP 9 AC/DC	QUICK-UP 11 AC/DC	QUICK-UP 12 AC/DC	QUICK-UP 14 AC/DC
Working height	8.1 m	9.5 m	10.8 m	12.3 m	13.7 m
Lift capacity	159 kg	159 kg	159 kg	136 kg	136 kg
Platform size	0.68 x 0.66 m	0.68 x 0.66 m	0.68 x 0.66 m	0.68 x 0.66 m	0.68 x 0.66 m
Width	0.8 m	0.8 m	0.8 m	0.8 m	0.8 m
Length	1.28 m	1.28 m	1.34 m	1.4 m	1.47 m
Weight (AC)	340 kg	360 kg	380 kg	415 kg	455 kg
Weight (DC)	382 kg	402 kg	422 kg	457 kg	497 kg

DIESEL ROUGH TERRAIN TELESCOPIC BOOMS



	HT16		HT23		HT28		HA43 RTJ PRO
	RTJ O	RTJ PRO	RTJ O	RTJ PRO	RTJ O	RTJ PRO	
Working height	16.1 m		22.5 m		27.9 m		42.2 m
Horizontal Outreach	13 m		18.3 m		23.85 m		20.2 m
Lift capacity	250 kg		230 kg		230 kg		230 kg
Width	2.29 m		2.47 m		2.48 m		2.5 m
Weight	7907 kg	7930 kg	13320 kg	13400 kg	17900 kg	18100 kg	21400 kg

ELECTRIC SCISSORS

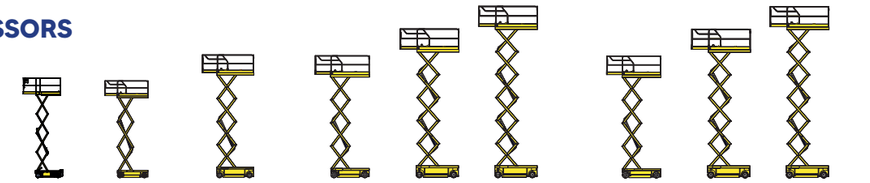


	NARROW MODELS			COMPACT MODELS			C LINE MODELS		
	Optimum 8	Compact 8N	Compact 10 N Dual	Compact 10 AE	Compact 12 AE	Compact 14 DUAL	Compact 10N	Compact 12	Compact 14
Working height	7.77 m	8 m	9.8 m	10 m	11.75 m	13.75 m	9.75 m	11.75 m	13.75 m
Lift capacity - inside	230 kg	350 kg	250 kg	450 kg	320 kg	320 kg	250 kg	320 kg	320 kg
Lift capacity - outside	230 kg	350 kg	250 kg	450 kg	320 kg	320 kg	N/A	320 kg	N/A
Platform size - extended	2.59 x 0.74 m	3.32 m	3.32 m	3.32 m	3.32 m	3.32 m	3.31 m	3.31 m	3.31 m
Overall width	0.79 m	0.81 m	0.81 m	1.17 m	1.17 m	1.17 m	0.81 m	1.20 m	1.20 m
Length	1.9 m	2.5 m	2.5 m	2.5 m	2.5 m	2.5 m	2.5 m	2.5 m	2.5 m
Weight	1590 kg	2120 kg	2150 kg	2490 kg	2940 kg	3070 kg	2150 kg	3000 kg	3055 kg

ELECTRIC ROUGH TERRAIN SCISSORS



	HS15 E	HS15 E PRO	HS18 E	HS18 E MAX	HS18 E PRO	HS21 E	HS21 E PRO
Working height	15 m		18 m			21,2 m	
Lift capacity	750 kg		750 kg			750 kg	
Platform size - extended	4.9 m	5.9 m	4.9 m	5.9 m	5.9 m	7.51 m	
Width	2.3 m		2.3 m			2.43 m	
Length	4.4 m		4.4 m			4.96 m	
Weight	7518 kg		8048 kg			10.620 kg	10.750 kg

DIESEL ROUGH TERRAIN SCISSORS



	COMPACT 10 DX	COMPACT 12 DX
Working height	10.28 m	12.06 m
Lift capacity	565 kg	450 kg
Platform size - extended	3.7 x 1.45 m	3.7 x 1.45 m
Width	1.78 m	1.78 m
Length	3.18 m	3.18 m
Weight	3350 kg	3965 kg

HAULOTTE WARRANTY 5 YEARS

Haulotte